

GSM DOOR ENTRY PHONE SYSTEM

MODEL:
TM-G750

3G


The TM-G750 is professionally designed for Wireless Intercom & Gate Access Control Applications. It deployed with the GSM Quad Band technology for wireless communication.



The TM-G750 Vandal-Proof GSM Wireless Intercom & Gate Access Control System is so advanced that it can be installed anywhere you want, (does not require network cabling); and with its GSM Quad-Band technology it can be used anywhere in the World-Wide GSM Network. The special engineering design Aluminium Alloy metal housing, it meets the higher standard for Vandal-Proof and Weather-Proof. The TM-G750 featured with Remote Access Control the gate through the landline phone or cellular phone by pressing the * key on the keypad. You can even grant the visitor entry into your home or office, while you are away from the office or home. The TM-G750 system provides Keyless Entry for door lock and door phones. The system can allow registered up to maximum 750 subscribers and each subscriber can be set with 3 different sets of phone number (one for landline and one for cellular phone). The system menu screen can allow the visitor to search the tenant's subscriber number. For more detail information, please visit our web site or give us a call.

Key Features

- Deployed 3G GSM quad-band technology for communication
- Engineering design aluminium alloy exterior housing for vandal-proof and weather-proof
- Durable and vandal-proof stainless steel buttons
- Wall and flush mounted / Full size keypad for easy operation / Large LCD Display for easy reading
- Calling from the entrance door to your (cell phone, home phone or office phone)
- On screen programming / On screen search tenant's subscriber number
- Programmable for calling PBX extension number
- Programmable up to 6 digits subscriber number for each tenant
- Programmable maximum 750 subscribers can be registered to the system
- Each subscriber can be set with 3 different phone numbers to answer the visitor's call
- Keyless Entry for door lock and door phones System provide power to open door lock

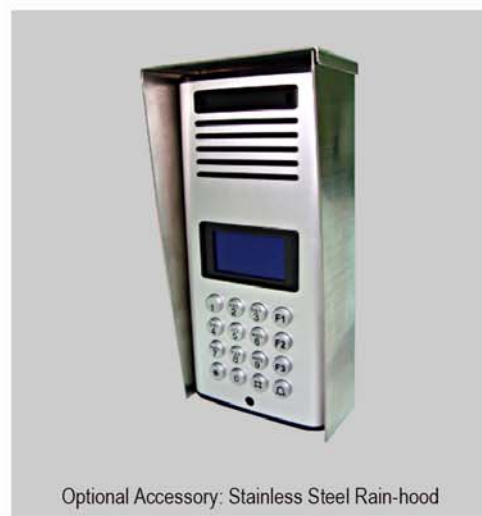

Technical Specification:

- GSM Frequency Band USA: Dual band UMTS/HSDPA 850MHz/1900MHz
- Quad band GSM/GPRS/EDGE 850MHz/1900MHz/900MHz/1800MHz
- DC Power Supply DC 13.5V / 1000mA
- Dimension: 10.2cm x 20.6cm x 3.2cm WxLxD

TMI Transformation Media Inc.

11068 - 158 Street, Surrey, BC, Canada V4N 5E9
Web Site: www.transformation-media.com
Email: sales@transformation-media.com
Tel: 1 (604) 930-2818 / Fax: 1 (604) 930-2880